



## Research paper

# Assessment of nano-scale Stirling refrigerator using working fluid as Maxwell–Boltzmann gases by thermo-ecological and sustainability criteria



Emin Açıkkalp<sup>a,\*</sup>, Ahmet Fevzi Savaş<sup>b</sup>, Necmettin Caner<sup>c</sup>, Hasan Yamık<sup>a</sup>

<sup>a</sup> Department of Mechanical and Manufacturing Engineering, Engineering Faculty, Bilecik S.E. University, Bilecik, Turkey

<sup>b</sup> Department of Industrial Design, Fine Arts Faculty, Bilecik S.E. University, Bilecik, Turkey

<sup>c</sup> Department of Chemistry, Faculty of Arts and Sciences, Eskisehir Osmangazi University, Eskisehir, Turkey

## ARTICLE INFO

## Article history:

Received 5 May 2016

In final form 22 June 2016

Available online 23 June 2016

## Keywords:

Nano scale irreversible Stirling refrigerator

Ecological function

Exergetic sustainability index

Ecological coefficient of performance

## ABSTRACT

Purpose of this paper is to investigate a nano scale irreversible Stirling refrigerator regarding size effects and presents one novel thermo-ecological criteria. System is researched by using four thermo-ecological and sustainable criteria. One novel criteria called modified ecological coefficient of performance (*MECOP*) is presented. Calculations are performed for irreversible cycle and results are obtained numerically. Finally, performance of the considered cycle is discussed and regarded criteria are compared. According to results, *ESI* is the most stable ecological criteria and *MECOP* is more stable than *ECOP* and  $x$  should be chosen as big as possible.

© 2016 Elsevier B.V. All rights reserved.

## 1. Introduction

Sustainable development is among the major issues in the World. Economical and environmental topics may be considered as two of the most important problems. Especially clean and sustainable energy should be crucially focused on because of the increasing energy need and environmental problems. Besides economic problems, environmental issues, such as global warming, have affected our life in last decade. Producing energy from the fossil fuels is the most important reason of the environmental pollution. For preventing the environmental problems as well as economic concerns, more efficient energy conversion tools are required.

Great efforts exist for designing more efficient thermal cycles. First studies about investigating actual thermal cycles, for more efficient systems, were conducted by Curzon–Ahlborn and Novikov [1,2]. They presented famous Curzon–Ahlborn–Novikov (CAN) engine that is endoreversible (internally reversible, however externally irreversible). These were first studies of Finite Time Thermodynamics (FTT). FTT is used for evaluating and optimizing endoreversible or irreversible thermal cycles, some examples for FTT might be seen in [3–8]. A lot of criteria based on FTT were submitted for the determining optimum performance of the actual

thermal cycles. One of these is the ecological function (*ECF*) recommended by Angulo–Brown [9] and it was improved by Yan [10]. Some papers about the refrigeration and Stirling cycles instigated in terms of ecological function are listed in Refs. [11–26]. Another ecological criteria is the ecological coefficient of performance (*ECOP*) [27–38]. Exergetic sustainable index (*ESI*) is the final criteria and some applications of *ESI* in the open literature can be found in [39–49].

Development in nano technology may be an alternative for the energy need and the environmental concerns in the future. Nano technology has been focal point of the researchers and nano thermal cycles studies have been increasing. In addition to that, molecular or nano cycles offers us different applications in biophysics, biochemistry and biomedicine [50]. Thermal cycles considering size effects are recommended for the more accurate outputs. Because, gas behaviors are different from macro scale in the nano/micro scale in finite domain. Some papers about the nano gases considering nano scale effects in the open literature are shown in [51–69].

In this paper, a nano-scale irreversible Stirling refrigerator is investigated by using four different thermo-ecological and sustainability criteria. Size effects in the nano scale are considered in the investigation. The classical thermodynamic cycle models and corresponding results only deal with the macro scaled gas systems, in which the boundary effects are unimportant. In general, for a micro-/nanoscaled gas cycle system, reversible or irreversible cycle

\* Corresponding author.

E-mail address: [eacikkalp@gmail.com](mailto:eacikkalp@gmail.com) (E. Açıkkalp).

models in macro scale and corresponding performance results cannot predict its performance characteristics due to the various boundary effects of the system. Further, under reversible and irreversible conditions, the boundary effects on gas system may be different [69]. In addition to these, a novel criteria called as modified ecological coefficient of performance (*MECOP*) based on the *ECOP* are presented. Considered cycle is evaluated, numerical results are presented and discussed.

## 2. Thermodynamic modeling

Thermodynamic modeling of a nano-scale irreversible Stirling refrigeration cycle is presented in this section. Nano-scale effects are considered for an irreversible Stirling refrigerator, dimensions of the nano cylinder are (diameter is  $R$  and length is  $H$ ) nanometer. Temperature – entropy diagram of the irreversible Stirling refrigerator is indicated in Fig. 1. Free energy of the Maxwell–Boltzmann gas considering nano-scale effects is [53,57]:

$$F = -NkT \left[ \frac{(2\pi mk)^{3/2} T^{3/2} \pi R^2 H}{N} + 1 \right] + Nk \frac{L_c(T)}{\sqrt{\pi}} \left( \frac{1}{R} + \frac{1}{H} \right) \quad (1)$$

where  $N$  is number of particles,  $L_c$  is half of the most probable Broglie's wave length,  $h$  is the Planck constant and  $k$  is Boltzmann constant. Using Eq. (1) Specific heats at constant volume ( $\text{J K}^{-1}$ ) for ideal Maxwell–Boltzmann gas is [53,57]:

$$c_v = \frac{3}{2} Nk + Nk \frac{L_c(T)}{4\sqrt{\pi}} \left( \frac{1}{R} + \frac{1}{H} \right) \quad (2)$$

And using Eq. (1) Pressure of the Maxwell–Boltzmann gas (Pa) is [53,57]:

$$P = \frac{NkT(L_c(T)R + H(L_c(T) + R))}{\pi H^2 R^3} \quad (3)$$

Cooling load of the refrigeration is (J) [71,72]:

$$Q_L = - \left( \int_3^4 c_v dT + \frac{P_4 V_4 - P_3 V_3}{1 - n_e} \right) \quad (4)$$

where  $n_e$  is the polytropic coefficient of the expansion process. Heat output from the cycle (J) is [71,72]:

$$Q_H = \int_1^2 c_v dT + \frac{P_2 V_2 - P_1 V_1}{1 - n_c} \quad (5)$$

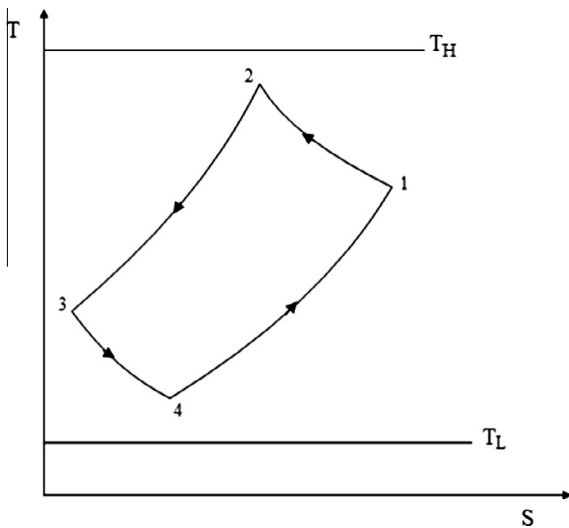


Fig. 1. T-S diagram of the system (adapted from [70]).

From the first law of the thermodynamics, work input to the system (J) is:

$$W = Q_H - Q_L \quad (6)$$

Entropy generation ( $\text{J K}^{-1}$ ) is the measurement of the irreversibilities of any cycle and it can be described by using second law of the thermodynamics as:

$$S_{gen} = \left( \frac{Q_H}{T_H} - \frac{Q_L}{T_L} \right) \quad (7)$$

Using polytropic equations temperatures of the system can be defined as following:

$$T_1 = T_2 x^{1-n_c}, \quad T_3 = T_4 x^{n_e-1}, \quad T_4 = \alpha T_2 \quad (8)$$

where  $x$  is the compression ratio and it is defined as  $\left( \frac{V_1}{V_2} = \frac{V_4}{V_3} = x \right)$ . Stroke volume of the cylinder is the:

$$V_1 = \pi R^2 H_s \quad (9)$$

where  $H_s$  is the stroke length. In this paper, ecological function is modified for the refrigeration cycles. It can be seen in Eq. (10). Purpose of this modification is to obtain maximum cooling load ( $Q_L$ ) when sum of the work input ( $W$ ) and exergy destruction ( $T_o S_{gen}$ ) is minimum. Because, cooling load is the objective function for any refrigeration system and increasing at work input and exergy destruction cause to decrease in the performance. Modified ecological function is (J) [51]:

$$MECF = Q_L - (W + T_o S_{gen}) \quad (10)$$

*ECOP* is the rate of the cooling load to exergy destruction and it is written as:

$$ECOP = \frac{Q_L}{T_o S_{gen}} \quad (11)$$

New criterion we proposed in this study is the modified ecological coefficient of performance. Similar to *MECF*, we consider cooling load as objective parameter and try to maximize it. *MECOP* can be defined as rate of the cooling load to sum of the work input and the exergy destruction.

$$MECOP = \frac{Q_L}{(W + T_o S_{gen})} \quad (12)$$

Last criterion we researched is the exergetic sustainability index. It is defined as the rate of the reversible work to difference of the exergy inlet and useful exergy. It can be seen in Eq. (13):

$$ESI = \frac{Q_H \left( 1 - \frac{T_o}{T_H} \right) - Q_L \left( 1 - \frac{T_o}{T_L} \right)}{W - Q_L \left( 1 - \frac{T_o}{T_L} \right)} \quad (13)$$

In this paper, analyses are conducted for the dimensionless parameters that are expressed following:

$$w = \frac{W}{NkT_H}, \quad q_L = \frac{Q_L}{NkT_H}, \quad mecf = \frac{MECF}{NkT_H}, \quad s_{gen} = \frac{S_{gen}}{Nk} \quad (14)$$


## 3. Results and discussion

This paper is about performance of an irreversible nano-scale Stirling refrigerator operating with ideal Maxwell–Boltzmann gas. Mentioned system is investigated by using four different thermo-ecological criteria. Analyses are calculated numerically and compared with each other. Fixed parameters used in the calculations are listed in Table 1.


In this paragraph, considered parameters are researched for  $x$  and results are indicated in Figs. 2–5. Fig. 2 represents changes of

**Table 1**  
Fixed parameters used in the calculations.

Data	Unit	Value
$m$	kg	$6.6474 \times 10^{-27}$
$h$	Js	$6.6262 \times 10^{-34}$
$k$	J	$1.0381 \times 10^{-23}$
$T_2$	K	300
$T_H$	K	350
$T_L$	K	270
$T_o$	K	298.15
$R$	m	$10 \times 10^{-9}$
$H$	m	$30 \times 10^{-9}$
$Hs$	m	$25 \times 10^{-9}$
$\alpha$	-	0.2
$n_e$	-	1.3
$n_c$	-	1.3

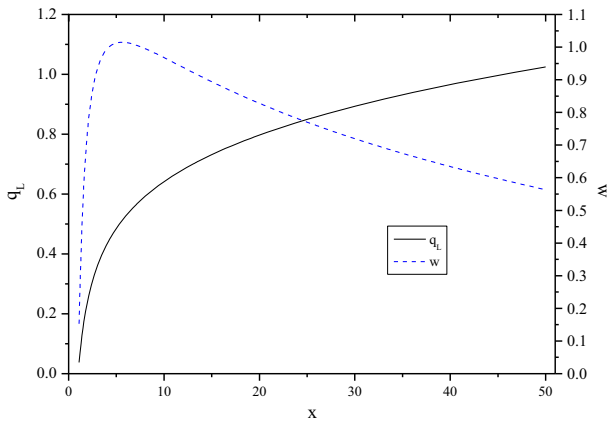


**Fig. 2.** Variations of  $q_L$  and  $w$  with  $x$ .

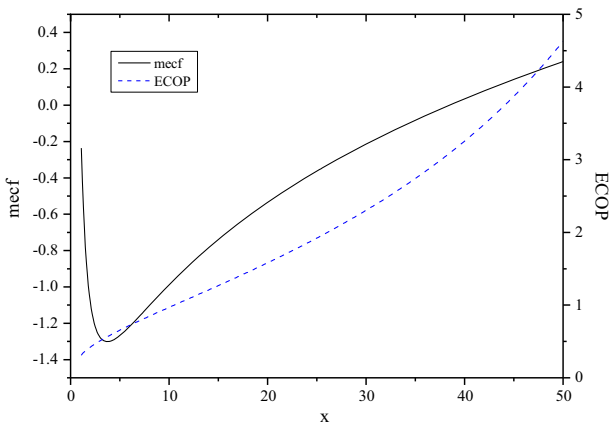


**Fig. 3.** Variations of  $mecf$  and  $ECOP$  with  $x$ .

the  $q_L$  and  $w$  according to  $x$ . It is shown that  $w$  increases logarithmically and it reaches a critical (maximum) point at  $x = 5.6$ , which is equal to 1.015.  $q_L$  increases logarithmically and its increasing rate is about 93%. Variations of  $mecf$  and  $ECOP$  are indicated in Fig. 3. As it shown,  $mecf$  has a critical (minimum) point. It reaches to its minimum at  $x = 3.7$  and it is equal to  $-1.009$ . Negative values are resulted from that sum of the work output and exergy destruction is bigger than the cooling load and it is obvious that these points must be avoided. After the critical point, it begins to rise up.  $ECOP$  rises up dramatically with  $x$  and its increasing rate is 93%.  $MECOP$ ,  $ESI$  and  $COP$  have the similar trend with  $ECOP$  and their increasing rates are 88%, 59% and 86% respectively. Finally,

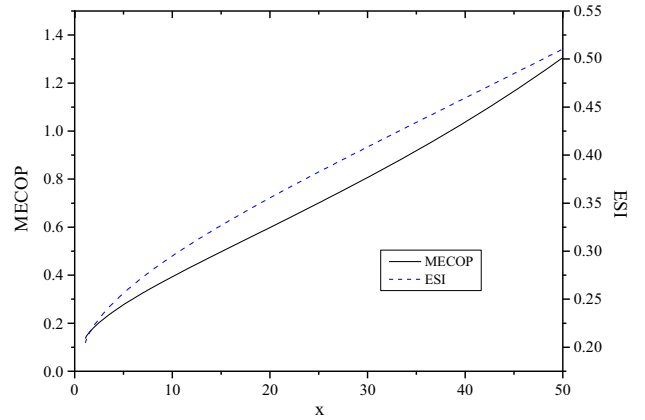


**Fig. 4.** Variations of  $MECOP$  and  $ESI$  with  $x$ .

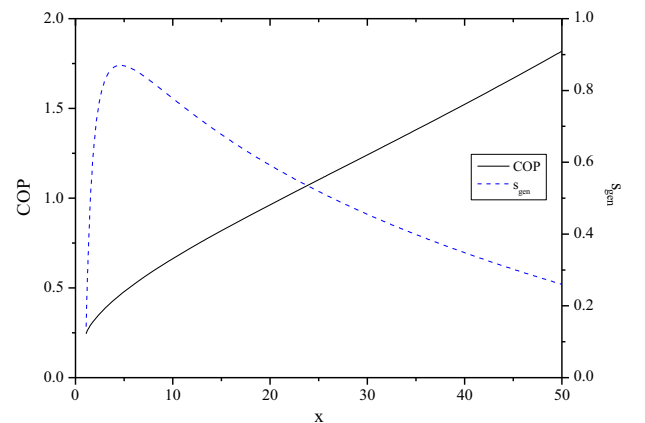

**Fig. 5.** Variations of  $COP$  and  $s_{gen}$  with  $x$ .

variation of the  $s_{gen}$  can be seen in Fig. 5 and it has a critical (maximum) point at  $x = 4.6$  and it is equal to 0.87 at this point. It must be avoided from the critical point of entropy generation, because entropy generation is the measurement of irreversibilities that are origin of the losses in a system. When  $ECOP$  and  $MECOP$  investigated, it can be seen that  $MECOP$  is more stable than  $ECOP$ . Because, its variation range is lower when compared with  $ECOP$ . However,  $ESI$  is the most stable one compared with others.

In Figs. 6–8, variations of the parameters according to  $w$  can be seen.  $q_L$  increases continuously with  $w$ , however,  $mecf$  has

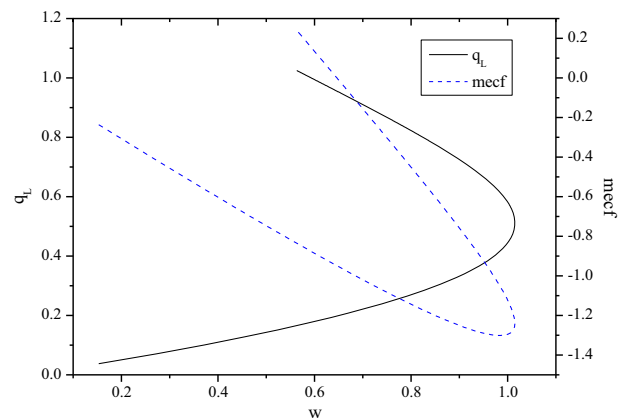

**Fig. 6.** Variations of  $q_L$  and  $mecf$  with  $w$ .

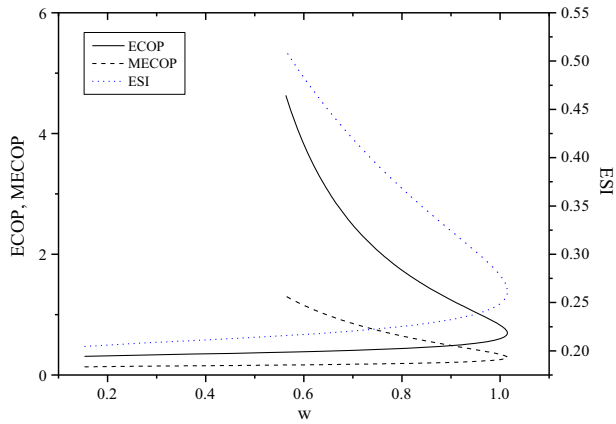


Fig. 7. Variations of ECOP, MECOP and ESI with  $w$ .

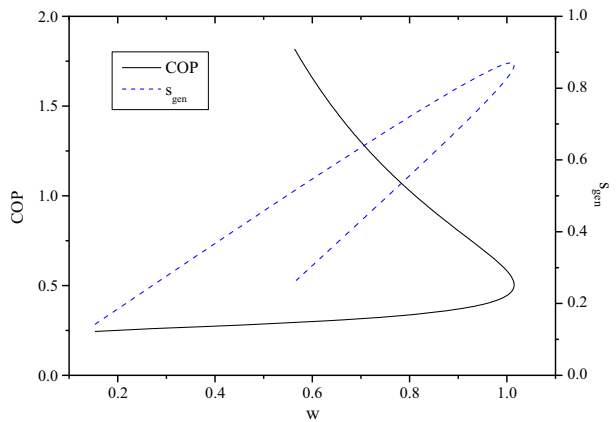


Fig. 8. Variations of COP and  $s_{gen}$  with  $w$ .

minimum point according to  $w$  and its minimum is at  $w = 0.98$ . ECOP, MECOP and ESI get 0.70, 0.29 and 0.26 respectively at the maximum  $w$ . they are decreasing slowly until  $w$  is the maximum and then increasing rates accelerate dramatically. Similarly, COP and  $s_{gen}$  are equal to 0.5 and 0.86 respectively at maximum  $w$ . Changing trend of the COP is the same with ECOP, MECOP and ESI.  $s_{gen}$  gets up until maximum  $w$  and then starts to reduce.

Fig. 9 shows the change of  $w$ ,  $mecf$  and ECOP with  $q_L$ .  $q_L = 0.51$ , when  $w$  is maximum and  $q_L = 0.41$  at critical point of  $mecf$ . ECOP

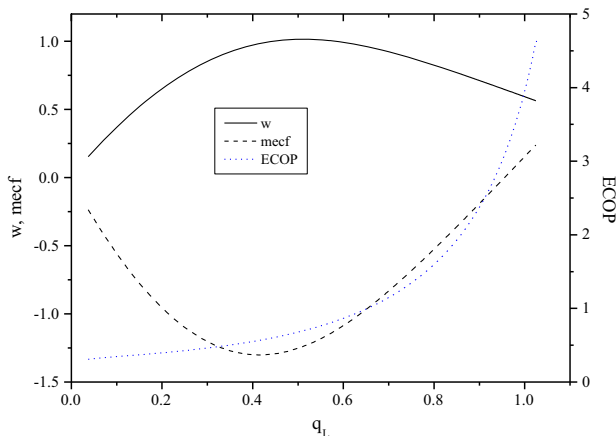


Fig. 9. Variations of  $mecf$ , ECOP and  $w$  with  $q_L$ .

increases logarithmically, it increases nearly linearly until 0.6, after this value it increases fast. According to Fig. 10, variations of COP and MECOP are similar with ECOP. ESI is nearly linear and  $q_L = 0.46$  when  $s_{gen}$  is maximum.

Finally, variations of considered parameters with COP can be shown in Figs. 11 and 12.  $q_L$  gets up logarithmically, rising rate of it is fast until about 0.8 and then its increasing rates starts to decrease. COP is 0.504 at maximum  $w$  that increases until nearly

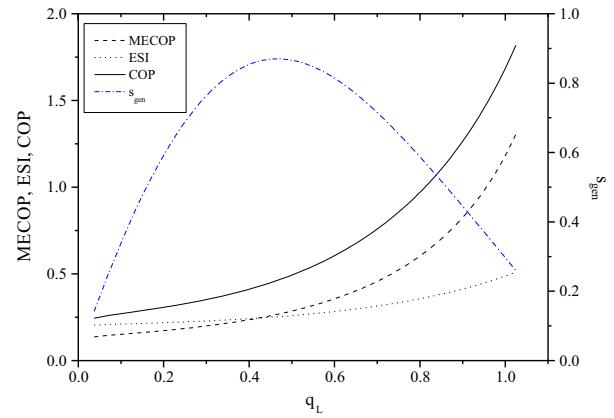


Fig. 10. Variations of MECOP, ESI, COP and  $s_{gen}$  with  $q_L$ .

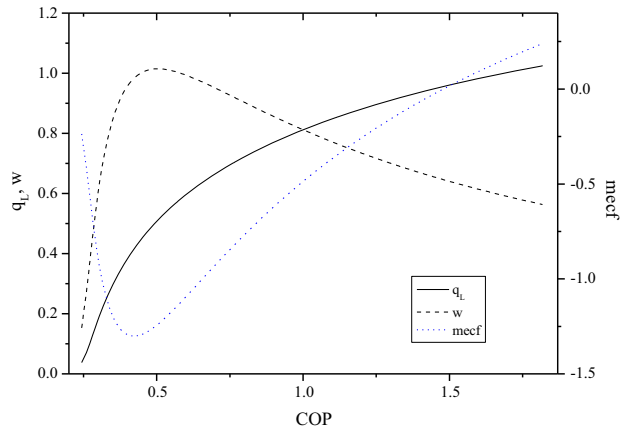


Fig. 11. Variations of  $mecf$ ,  $q_L$  and  $w$  with COP.

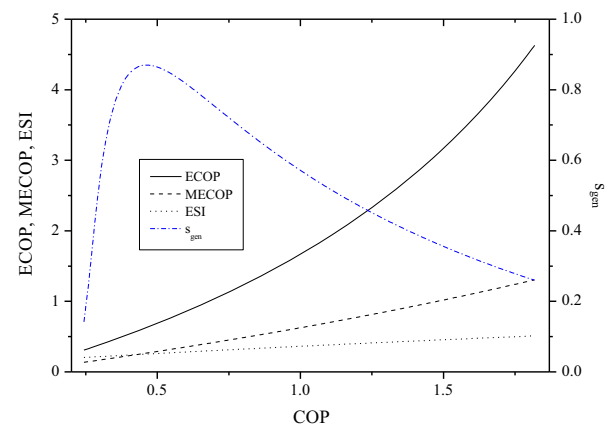


Fig. 12. Variations of ECOP, MECOP, ESI and  $s_{gen}$  with COP.

0.5 and then it decreases.  $COP$  is 0.42 at minimum  $mecf$ , after this value, it begins to increase.  $ECOP$ ,  $MECOP$  and  $ESI$  changes nearly linear with  $COP$ . Entropy generation reaches its critical value is at  $COP = 0.46$  and then it starts to decrease.

#### 4. Conclusions

An irreversible nano-scale Stirling refrigerator is investigated in this paper. One novel thermo-ecological criteria are suggested, called as modified ecological coefficient of performance. Performance of the cycle is evaluated with different criteria. When our results are compared with studies about micro/nano cycles in the literatures [73–75], it can be seen that our results harmonized with them. Results show that nano systems obey same limitations with engineering thermodynamics, like Carnot efficiency, these system cannot be operated with 100% efficiency and Gouy–Stodola theorem to complex systems (based on the use of entropy generation) can obtain the extension of classical thermodynamics to nano thermodynamics. Some important results acquired from calculations are listed following:

- $w$ ,  $S_{gen}$  and  $mecf$  have critical values and it must be avoided from these points.
- Variation rates of  $ECOP$ ,  $MECOP$ ,  $ESI$  and  $COP$  are 93%, 89%, 59% and 86% respectively. According to this,  $ESI$  is the most stable ecological criteria and  $MECOP$  is more stable than  $ECOP$ .
- $x$  should be chosen as big as possible with respect to results.

Investigating the results submitted, it is suggested that nano-scale irreversible Stirling refrigerator should be examined for different criteria before designing. In addition to that,  $MECOP$  is recommended to be added among the thermo-ecological criteria existing in the literature and it should be researched for the other cycles.

#### Acknowledgements

The authors would like to thank the reviewers for their valuable comments, which have been utilized in improving the quality of the paper.

#### References

- [1] F.L. Curzon, B. Ahlborn, Efficiency of a Carnot engine at maximum power-output, *Am. J. Phys.* 43 (1975) 22–24.
- [2] I.I. Novikov, The efficiency of atomic power stations, *J. Nucl. Energy* 11 (1958) 25–28.
- [3] Hamed Sahraie, Mohammad Reza Mirani, Mohammad Hossein Ahmadi, Milad Ashouri, Thermo-economic and thermodynamic analysis and optimization of a two-stage irreversible heat pump, *Energy Convers. Manage.* 99 (2015) 81–91.
- [4] Mohammad H. Ahmadi, Mohammad Ali Ahmadi, Seyed Abbas Sadatsakkak, Thermodynamic analysis and performance optimization of irreversible Carnot refrigerator by using multi-objective evolutionary algorithms (MOEAs), *Renew. Sustain. Energy Rev.* 51 (2015) 1055–1070.
- [5] Mohammad H. Ahmadi, Mohammad-Ali Ahmadi, Michel Feidt, Thermodynamic analysis and evolutionary algorithm based on multi-objective optimization of performance for irreversible four-temperature-level refrigeration, *Mech. Ind.* 16 (2) (2015) 207.
- [6] Mohammad Hossein Ahmadi, Mohammad Ali Ahmadi, Multi objective optimization of performance of three-heat-source irreversible refrigerators based algorithm NSGAII, *Renew. Sustain. Energy Rev.* 60 (2016) 784–794.
- [7] G. Gonca, B. Sahin, Y. Ust, A. Parlak, Comprehensive performance analyses and optimization of the irreversible thermodynamic cycle engines (TCE) under maximum power (MP) and maximum power density (MPD) conditions, *Appl. Therm. Eng.* 85 (2015) 9–20.
- [8] G. Gonca, Performance analysis and optimization of Irreversible Dual-Atkinson Cycle Engine (DACE) with heat transfer effects under maximum power and maximum power density conditions, *Appl. Math. Model.* 40 (2016) 6725–6736.
- [9] F. Angulo-Brown, An ecological optimization criterion for finite-time heat engines, *J. Appl. Phys.* 69 (1991) 7465–7469.
- [10] Z. Yan, Comment on ecological optimization criterion for finite-time heat-engines, *J. Appl. Phys.* 73 (1993) 3583.
- [11] Y. Huang, D. Sun, Y. Kang, Performance optimization for an irreversible four temperature-level absorption heat pump, *Int. J. Therm. Sci.* 4 (2008) 7479–7485.
- [12] Z. Yan, G. Lin, Ecological optimization criterion for an irreversible three-heat-source refrigerator, *Appl. Energy* 66 (2000) 213–224.
- [13] L. Chen, X. Zhu, F. Sun, C. Wu, Ecological optimization for generalized irreversible Carnot refrigerators, *J. Phys. D: Appl. Phys.* 38 (2005) 113–118.
- [14] L. Chen, X. Zhu, F. Sun, C. Wu, Exergy-based ecological optimization for a generalized irreversible Carnot heat-pump, *Appl. Energy* 84 (2007) 78–88.
- [15] X. Zhu, L. Chen, F. Sun, C. Wu, Exergy based ecological optimization for a generalized irreversible Carnot refrigerator, *J. Energy Inst.* 79 (2006) 42–46.
- [16] L. Chen, X. Zhu, F. Sun, C. Wu, Ecological optimization of a generalized irreversible Carnot refrigerator for a generalized heat transfer law, *Int. J. Ambient Energy* 28 (2007) 213–219.
- [17] J. Li, L. Chen, F. Sun, C. Wu, Ecological performance of an endoreversible Carnot refrigerator with complex heat transfer law, *Int. J. Ambient Energy* 32 (2011) 31–36.
- [18] L. Chen, J. Li, F. Sun, Ecological optimization of a generalized irreversible Carnot refrigerator in case of  $Q_{\infty} (\Delta T^m)^m$ , *Int. J. Sustain. Energy* 31 (2012) 59–72.
- [19] S.K. Tyagi, S.C. Kaushik, R. Salhotra, Ecological optimization, parametric study of irreversible Stirling, Ericsson heat pumps, *J. Phys. D: Appl. Phys.* 35 (2002) 2058–2065.
- [20] X. Zhu, L. Chen, F. Sun, C. Wu, Effect of heat transfer law on the ecological optimization of a generalized irreversible Carnot heat pump, *Int. J. Exergy* 2 (2005) 423–436.
- [21] X. Zhu, L. Chen, F. Sun, C. Wu, The ecological optimization of a generalized irreversible Carnot heat pump for a generalized heat transfer law, *J. Energy Inst.* 78 (2005) 5–10.
- [22] L. Chen, J. Li, F. Sun, C. Wu, Effect of a complex generalized heat transfer law on ecological performance of an endoreversible Carnot heat pump, *Int. J. Ambient Energy* 30 (2009) 102–108.
- [23] J. Li, L. Chen, F. Sun, Optimal ecological performance of a generalized irreversible Carnot heat pump with a generalized heat transfer law, *Termoteh. Therm. Eng.* 13 (2009) 61–68.
- [24] S.K. Tyagi, S.C. Kaushik, R. Salhotra, Ecological optimization, performance study of irreversible Stirling, Ericsson heat engines, *J. Phys. D: Appl. Phys.* 35 (2002) 2668–2675.
- [25] X. Zhu, L. Chen, F. Sun, C. Wu, Exergy-based ecological optimization for a generalized Carnot refrigerator, *J. Energy Inst.* 79 (2006) 42–46.
- [26] E. Açıkkalp, Modified thermo-ecological optimization for refrigeration systems and an application for irreversible four-temperature-level absorption refrigerator, *Int. J. Energy Environ. Eng.* 4 (2013) 20.
- [27] Y. Ust, B. Sahin, O.S. Sogut, Performance analysis, optimization of an irreversible dual – cycle based on an ecological coefficient of performance criterion, *Appl. Energy* 82 (2005) 23–39.
- [28] Y. Ust, B. Sahin, Performance optimization of irreversible refrigerators based on a new thermo – ecological criterion, *Int. J. Refrig.* 30 (2007) 527–534.
- [29] Y. Ust, B. Sahin, A. Kodal, I.H. Akcay, Ecological coefficient of performance analysis, optimization of an irreversible regenerative – Brayton heat engine, *Appl. Energy* 83 (2006) 558–572.
- [30] S.S. Sogut, Y. Ust, B. Sahin, The effects of intercooling, regeneration on thermo – ecological performance analysis of an irreversible – closed Brayton heat engine with variable – temperature thermal reservoirs, *J. Phys. D: Appl. Phys.* 39 (2006) 4713–4721.
- [31] Y. Ust, Effect of regeneration on the thermo-ecological performance analysis, optimization of irreversible air refrigerators, *Heat Mass Transf.* 46 (2010) 469–478.
- [32] Y. Ust, Performance analysis, optimization of irreversible air refrigeration cycles based on ecological coefficient of performance criterion, *Appl. Therm. Eng.* 29 (2009) 47–55.
- [33] Y. Ust, O.S. Sogut, B. Sahin, A. Durmayaz, Ecological coefficient of performance ECOP optimization for an irreversible Brayton heat engine with variable-temperature thermal reservoirs, *J. Energy Inst.* 79 (2006) 47–52.
- [34] Y. Ust, B. Sahin, A. Kodal, Performance analysis of an irreversible Brayton heat engine based on ecological coefficient of performance criterion, *Int. J. Therm. Sci.* 45 (2006) 94–101.
- [35] Y. Ust, B. Sahin, A. Kodal, Ecological coefficient of performance ECOP optimization for generalized irreversible Carnot heat engines, *J. Energy Inst.* 78 (2005) 145–151.
- [36] Y. Ust, B. Sahin, A. Safa, Ecological performance analysis of an endoreversible regenerative Brayton heat-engine, *Appl. Energy* 80 (2005) 247–260.
- [37] G. Gonca, B. Sahin, Performance optimization of an air-standard irreversible Dual-Atkinson Cycle Engine based on the ecological coefficient of performance criterion, *Sci. World J.* 815787 (2014) 1–10.
- [38] Y. Ust, B. Sahin, O.S. Sogut, Performance analysis and optimization of an irreversible dual-cycle based on an ecological coefficient of performance criterion, *Appl. Energy* 82 (1) (2005) 23–39.
- [39] E. Açıkkalp, Exergetic sustainability evaluation of irreversible Carnot refrigerator, *Physica A* 436 (2015) 311–320.
- [40] E. Açıkkalp, N. Caner, Application of exergetic sustainability index to a nano-scale irreversible Brayton cycle operating with ideal Bose and Fermi gasses, *Phys. Lett. A* 379 (2015) 1990–1997.
- [41] E. Açıkkalp, N. Caner, Application of exergetic sustainability index to the quantum irreversible Diesel refrigerator cycles for 1-D box system, *Eur. Phys. J. Plus* 130 (2015) 73.

- [42] A. Midilli, H. Kucuk, I. Dincer, Environmental and sustainability aspects of a recirculating aquaculture system, *Environ. Prog. Sustain. Energy* 31 (2012) 604–611.
- [43] E. Bozoglan, A. Midilli, A. Hepbasli, Sustainable assessment of solar hydrogen production techniques, *Energy* 46 (2012) 85–93.
- [44] Adnan Midilli, I. Dincer, Development of some exergetic parameters for PEM fuel cells for measuring environmental impact and sustainability, *Int. J. Hydrog. Energy* 34 (2009) 3858–3872.
- [45] H. Aydın, Exergetic sustainability analysis of LM6000 gas turbine power plant with steam cycle, *Energy* 57 (2013) 766–774.
- [46] H. Aydın, Ö. Turan, T.H. Karakoç, A. Midilli, Exergetic sustainability indicators as a tool in commercial aircraft: a case study for a turbofan engine, *Int. J. Green Energy* 12 (2015) 28–40.
- [47] H. Aydın, Ö. Turan, T.H. Karakoç, A. Midilli, Sustainability assessment of PW6000 turbofan engine: an exergetic approach, *Int. J. Exergy* 14 (2014) 388–412.
- [48] H. Aydın, Ö. Turan, T.H. Karakoç, A. Midilli, Exergo-sustainability indicators of a turboprop aircraft for the phases of a flight, *Energy* 58 (2013) 550–560.
- [49] A. Dalkıran, E. Açıkkalp, N. Caner, Analysis of a quantum irreversible Otto cycle with exergetic sustainable index, *Physica A* 453 (2016) 316–326.
- [50] U. Lucia, Molecular refrigerators: a new approach in anti-cancer therapy, *OA Med. Hypothesis* 1 (2013) 9.
- [51] A. Dalkıran, E. Açıkkalp, A.F. Savaş, Analysis of a nano-scale thermo-acoustic refrigerator, *Int. J. Refrig.* 66 (2016) 1–9.
- [52] A. Şişman, H. Saygin, The improvement effect of quantum degeneracy on the work from a Carnot cycle, *Appl. Energy* 68 (2001) 367–376.
- [53] A. Sisman, I. Muller, The Casimir-like size effects in ideal gases, *Phys. Lett. A* 320 (2004) 360–366.
- [54] C. Firat, A. Sisman, Z.F. Ozturk, Thermodynamics of gases in nano cavities, *Energy* 35 (2010) 814–819.
- [55] J. Guo, X. Zhang, G. Su, J. Chen, The performance analysis of a micro-/nanoscaled quantum heat engine, *Physica A* 391 (2012) 6432–6439.
- [56] A. Sisman, Z.F. Ozturk, C. Firat, Quantum boundary layer: a non-uniform density distribution of an ideal gas in thermodynamic equilibrium, *Phys. Lett. A* 362 (2007) 16–20.
- [57] Altug Sisman, Surface dependency in thermodynamics of ideal gases, *J. Phys. A: Math. Gen.* 37 (2004) 11353–11361.
- [58] Z.F. Ozturk, A. Sisman, C. Firat, Quantum effects on gas diffusion at the nano scale, *Int. J. Thermodyn.* 14 (2011) 163–166.
- [59] A. Sisman, G. Babac, Quantum size effects on classical thermodynamic effects, *Continuum Mech. Thermodyn.* 24 (2012) 339–346.
- [60] G. Babac, A. Sisman, Classical thermodynamic effects in degenerate quantum gases, *J. Comput. Theor. Nanosci.* 8 (2011) 1–4.
- [61] G. Babac, A. Sisman, Thermodynamic cycles based on classical thermodynamic effects, *J. Comput. Theor. Nanosci.* 8 (2011) 1–7.
- [62] E. Açıkkalp, N. Caner, Performance of an irreversible nano Brayton cycle operating with Maxwell–Boltzmann gas, *Eur. Phys. J. Plus* 130 (2015) 93.
- [63] E. Açıkkalp, N. Caner, Determining of the optimum performance of a nano scale irreversible dual cycle with quantum gases as working fluid by using different methods, *Physica A* 433 (2015) 247–258.
- [64] E. Açıkkalp, N. Caner, Determining performance of an irreversible nano scale dual cycle operating with Maxwell–Boltzmann gas, *Physica A* 424 (2015) 342–349.
- [65] W.J. Nie, J.Z. He, Performance analysis of a thermodynamic micro/nano heat engine, *Phys. Lett. A* 372 (2008) 1168–1173.
- [66] W.J. Nie, J.Z. He, X. He, A micro-/nanothermodynamic refrigerator and its performance analysis, *J. Appl. Phys.* 103 (2008) 114909–114916.
- [67] W.J. Nie, J.Z. He, Quantum boundary effect on the work output of a micro-/nanoscaled Carnot cycle, *J. Appl. Phys.* 105 (2009) 054903–54905.
- [68] W.J. Nie, J.Z. He, J.Q. Du, Performance characteristic of a Stirling refrigeration cycle in micro/nano scale, *Physica A* 388 (2009) 318–324.
- [69] W. Nie, Q. Liao, C.Q. Zhang, J. He, Micro-/nanoscaled irreversible Otto engine cycle with friction loss and boundary effects and its performance characteristics, *Energy* 35 (2010) 4658–4662.
- [70] L.B. Erbay, H. Yavuz, The maximum cooling density of a realistic Stirling refrigerator, *J. Phys. D: Appl. Phys.* 31 (1998) 291–293.
- [71] H. Hosseinzade, H. Sayyaadi, M. Babaelahi, A new closed-form analytical thermal model for simulating Stirling engines based on polytropic-finite speed thermodynamics, *Energy Convers. Manage.* 90 (2015) 395–408.
- [72] Y. Cengel, M.A. Boles, *Thermodynamics: An Engineering Approach*, fourth ed., McGraw-Hill Press, 2002.
- [73] U. Lucia, Entropy production and generation: clarity from nanosystems considerations, *Chem. Phys. Lett.* 629 (2015) 87–90.
- [74] U. Lucia, A link between nano- and classical thermodynamics: dissipation analysis (the entropy generation approach in nano-thermodynamics), *Entropy* 17 (2015) 1309–1328.
- [75] U. Lucia, Some considerations on molecular machines and Loschmidt paradox, *Chem. Phys. Lett.* 623 (2015) 98–100.